ClassicFlame™ PRO
BUILDER • DEVELOPER

36” Contemporary Builder’s Box

Model No.:	36EB111-GRC : 110v
Dimensions:	36”w x 24”h x 7.62”d
Viewable Area:	33.5”w x 18”h
Model No.:	36EB221-GRC : 220v
Dimensions:	36”w x 24”h x 7.62”d
Viewable Area:	33.5”w x 18”h

SPECIFICATIONS - Wiring Options

36EB111 Only	Both	36EB221 Only
3- Prong Plug	Hard Wired	Hard Wired
120 volts 1440 watts (4400 BTU’s) 12 amps	120 volts 1440 watts (4400 BTU’s) 12 amps	208/240 volts 2100/2800 watts (6700/8900 BTU’s) 10.1/11.7 amps

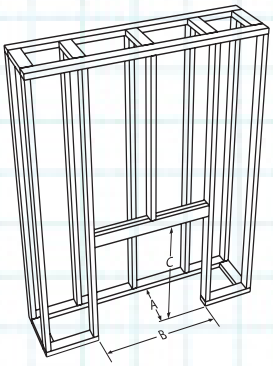



* Can be installed into a wall or corner

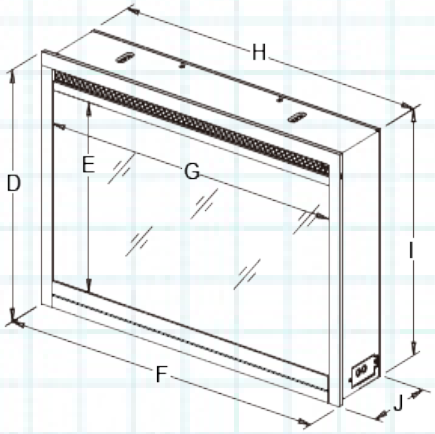

*

Controls are Wall Mounted & Feature a Hand-Held Remote Control

FRAME OPENING DIMENSIONS

A	B	C	D	E	F	G
8”	35”	23.8”	24”	18”	36”	33.5”
H	I	J	K	L	M	
34.7”	23.6”	7.8”	51”	36”	36”	

FEATURES

- Multi-colored LED flame effect with different color combinations
- Flames flow from a bed of simulated smooth white and clear river stones.
- 36EB111-GRC: Can be plugged directly into a standard 120V 3-prong outlet (power cord included)

  36EB221-GRC: Can be hardwired into a home’s electrical system and used with an external thermostat (included)*
- Integrated junction box for hardwiring installation
- Includes extra large mounting hardware
- Zero-clearance design allows flush mounting to drywall, tile or other home finishes
- Total surround flange for installation before or after drywalling
- Installs into above or below grade rooms; interior walls, exterior walls or corners
- Installation recommended by a qualified electrician

OPERATING COSTS
Based on 10 cents per kWh

.25¢ per hr - Flame only
14.4¢ per hr - 5,000 BTU’s
21-28¢ per hr - 9,200 BTU’s

GREEN CLEAN SAFE
Energy Efficient
All LED Technology

Automatic On Screen Indicator:



- Works from remote or manual controls
- Function Indicator Lights up when operated then automatically disappears after 4 seconds
- Shows temperature, downlight and brightness settings and includes an automatic shut off timer

©2010 Twin-Star International, Inc
Twin-Star International, Inc. • 1690 S. Congress Ave., Suite 210
Delray Beach, FL 33445 • Tel: 888-776-2490 • Fax: 561-330-3205